


1.50" BOLTS (TYP)
 1.75" BOLTS (TYP)
 1.25" BOLTS (TYP)

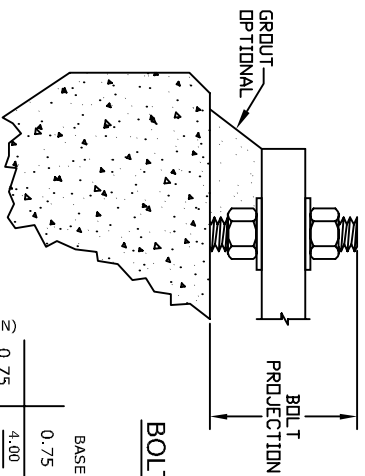

BOLT DIAMETER (IN)	BASE PLATE THICKNESS (IN)			
	0.75	1.00	1.25	1.50
0.75	4.00	4.25	4.50	4.75
	5.00	5.25	5.50	5.75
1.00	4.50	4.75	5.00	5.25
	5.50	5.75	6.00	6.25
1.25	5.00	5.25	5.50	5.75
	6.00	6.25	6.50	6.75
1.50	5.50	5.75	6.00	6.25
	6.50	6.75	7.00	7.25
1.75	6.00	6.25	6.50	6.75
	7.00	7.25	7.50	7.75

BOLT PROJECTION (MIN) (MAX)

NOTES:

1. GROUTING UNDER BASEPLATE IS OPTIONAL.
2. IF GROUT IS USED, THEN ADEQUATE WEEP HOLES MUST BE CREATED TO PREVENT MOISTURE ENTRAPMENT.
3. BOLT HOLES AS SHOWN INCLUDE 1/8" TOLERANCE (1/4" for 1.75").
4. ALL LUMINAIRES AND/OR LUMINAIRE ARMS SHALL BE ORIENTED BETWEEN ANCHOR BOLTS.

DATE: _____

PROJECT: _____

POLE TYPE: _____



**WHITE
 POLES**

2800 SOUTH HULEN STREET, SUITE 210
 FORT WORTH, TX. 76109
 METRO (817) 429-5200
 TOLL FREE (800) 433-7753
 FAX (817) 926-5003

SCALE:	REV.:	CHECKED BY:
NTS	0	TSL
DRAWING NUMBER:		DRAWN BY:
ABT-165-4		

ANCHOR BOLT TEMPLATE
 (NOT TO SCALE)