


1.50' BOLTS (TYP)
1.75' BOLTS (TYP)

LIGHTING
DIRECTION

27.00" BOLT CIRCLE
DIAMETER

NOTES:


1. GROUTING UNDER BASEPLATE IS OPTIONAL.
2. IF GROUT IS USED, THEN ADEQUATE WEEP HOLES MUST BE CREATED TO PREVENT MOISTURE ENTRAPMENT.
3. BOLT HOLES AS SHOWN INCLUDE 1/8" TOLERANCE FOR 1.50" BOLTS AND 1/4" FOR 1.75" BOLTS.

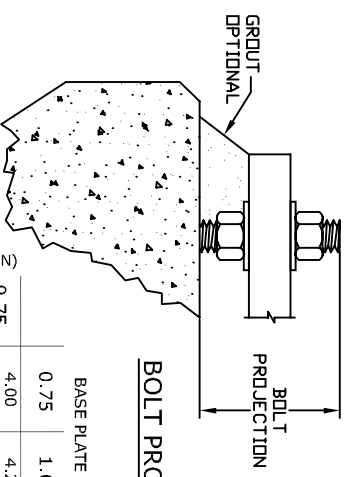

BOLT DIAMETER (IN)	BASE PLATE THICKNESS (IN)				
	0.75	1.00	1.25	1.50	
0.75	4.00	4.25	4.50	4.75	
	5.00	5.25	5.50	5.75	
1.00	4.50	4.75	5.00	5.25	
	5.50	5.75	6.00	6.25	
1.25	5.00	5.25	5.50	5.75	
	6.00	6.25	6.50	6.75	
1.50	5.50	5.75	6.00	6.25	
	6.50	6.75	7.00	7.25	
1.75	6.00	6.25	6.50	6.75	
	7.00	7.25	7.50	7.75	

BOLT PROJECTION (MIN)
(MAX)

DATE: _____
PROJECT: _____
POLE TYPE: _____



**WHITES
POLES**
2800 SOUTH HULEN STREET, SUITE 210
FORT WORTH, TX. 76109
METRO (817) 429-5200
TOLL FREE (800) 433-7753
FAX (817) 926-5003

SCALE:	REVISION:	CHECKED BY:
NTS	0	TSL
DRAWING NUMBER:	DRAWN BY:	
ABT-270-12	TSL	

**ANCHOR BOLT TEMPLATE
(NOT TO SCALE)**