


LIGHTING
DIRECTION

1.50' BOLTS (TYP)
1.75' BOLTS (TYP)

32.00' BOLT CIRCLE
DIAMETER

62d'

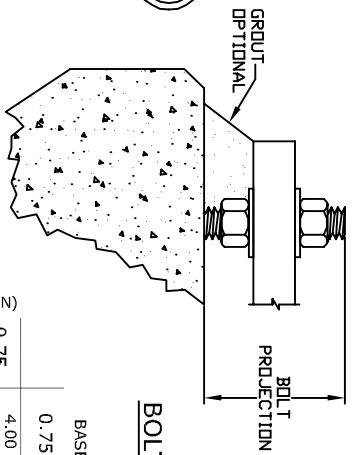

BOLT DIAMETER (IN)	BASE PLATE THICKNESS (IN)				
	0.75	1.00	1.25	1.50	
0.75	4.00	4.25	4.50	4.75	
	5.00	5.25	5.50	5.75	
1.00	4.50	4.75	5.00	5.25	
	5.50	5.75	6.00	6.25	
1.25	5.00	5.25	5.50	5.75	
	6.00	6.25	6.50	6.75	
1.50	5.50	5.75	6.00	6.25	
	6.50	6.75	7.00	7.25	
1.75	6.00	6.25	6.50	6.75	
	7.00	7.25	7.50	7.75	

BOLT PROJECTION (MIN)
(MAX)

NOTES:

1. GROUTING UNDER BASEPLATE IS OPTIONAL.
2. IF GROUT IS USED, THEN ADEQUATE WEEP HOLES MUST BE CREATED TO PREVENT MOISTURE ENTRAPMENT.
3. BOLT HOLES AS SHOWN INCLUDE 1/8" TOLERANCE (1/4" for 1.75").

DATE: _____
PROJECT: _____
POLE TYPE: _____



White's Poles
2800 SOUTH HULEN STREET, SUITE 210
FORT WORTH, TX. 76109
METRO (817) 429-5200
TOLL FREE (800) 433-7753
FAX (817) 926-5003

SCALE: NTS
REV: 0
DRAWING NUMBER: ABT-320-16
CHECKED BY: TSL
DRAWN BY:

ANCHOR BOLT TEMPLATE
(NOT TO SCALE)